

Plug SLS205-L...


In-line, Ø 2 mm with spring-loaded MULTILAM for self-assembly of test leads.

Solder connection.

SLS205-L



SLS205-L/N

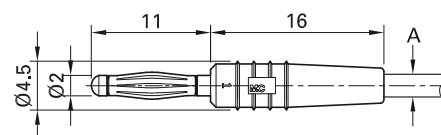

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2618-*	SLS205-L	30 VAC / 10 A 60 VDC / 10 A	max. Ø 2.1 mm 0.5 mm ²	Au	21 22 23 24 25
22.2619-*	SLS205-L/N	30 VAC / 10 A 60 VDC / 10 A	max. Ø 2.1 mm 0.5 mm ²	Ni	21 22

Component parts

22.2010-*	KT2-S	Insulator
22.1009	LS205-L	Plug for SLS205-L
22.5029	LS205-L/N	Plug for SLS205-L/N



Optional colors 23 24 25 26 27 28 29

Further information, page 6



Assembly instructions MA136

www.staubli.com/electrical