ECCOSORB[®] BSR-U

HIGH LOSS, THIN, ELASTOMERIC MICROWAVE ABSORBER

Description :

Eccosorb BSR-U is a thin, flexible, high-loss, electrically non-conductive urethane absorber.

Eccosorb BSR-U is available in two types, Eccosorb BSR-U-1 & Eccosorb BSR-U-2, both tuned to different frequency areas. The product is effective in reducing surface currents in cavity resonance applications in the GHz to mm wave frequency range. It is available in a wide range of thicknesses to suit an extremely broad range of applications including very small microwave cavities typically seen in higher frequencies.

The main advantages of the polyurethane version are its ease of bonding to various substrates and the availability of a self-adhesive version, which will allow for quick assembly.

Further they offer high mechanical strength and excellent abrasion resistance.

Will withstand temperatures from -40°C to 120°C.

Application :

Eccosorb BSR-U is effective in reducing surface currents, cavity resonances, coupling and to some extent specular reflections due to the absorber's high permittivity and permeability as well as high loss values.

It will significantly improve the operation of microwave devices by lowering the Q of cavities.

Eccosorb BSR-U will reduce the reflections from metal structures through the absorption of surface currents.

Applications include power amplifiers, oscillators and down/up converters.

Physical Properties :


	BSR-U
Colour	Grey
Dimensions (mm)	305 x 305
Thickness range (mm)	0.25 to 2.0
Hardness (Shore A)	80
Elongation (%)	50
Tensile strength (Mpa)	3.5

Emerson & Cuming Microwave Products N.V. Bell Telephonelaan 2B – B-2440 Geel – Belgium Tel: +32 14 56 25 00 – Fax +32 14 56 25 01 Geel.Sales@lairdtech.com - www.eccosorb.eu



ECCOSORB[®] BSR-U

Electromagnetic Properties :

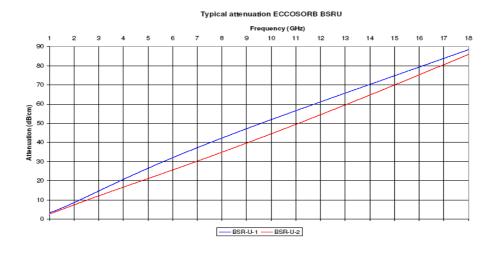

Availability :

Eccosorb BSR-U is available in sheets of 305 mm x 305 mm.

Standard thicknesses are 0.25mm, 0.50mm, 1.0mm, 1.5mm and 2mm, respectively designated as Eccosorb BSR-U-10, BSR -U-20, BSR -U-40 BSR -U-60 and BSR -U-80.

It can be supplied with a pressure sensitive adhesive designated as Eccosorb BSR -U-xx-SA, where the -SA suffix stands for Self-Adhesive .

The products are also available in other sizes, thicknesses and customer specified configurations upon request. This includes die cut and kiss cut parts to reduce installation labour by allowing quick assembly.

Instructions for use :

Eccosorb BSR -U is designed to function directly in front of a metallic surface.

If this is not the case, a metallic foil should first be bonded to the object.

As it is a homogeneous material, there is no distinction between its front and back face.

To obtain a strong bond of the absorber to the object, the metallic surface should be first thoroughly cleaned with a degreasing solvent.

Epoxy and acrylic adhesives are recommended or use the self-adhesive version.

Eccosorb BSR -U can be readily cut with a sharp knife and template.

It is a very flexible material and will conform to mild curvatures.



Safety Considerations : It is recommended to consult the EMERSON & CUMING MICROWAVE PRODUCTS product literature, including material safety data sheets, prior to use EMERSON & CUMING MICROWAVE PRODUCTS products. These may be obtained from your local sales offit or. WARRANTY : Values shown are based on testing of laboratory test specimens and represent data that falls within the normal range of properties of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specific ation purposes. Any determination of the usuitability of the material or any use contemplated by the user and the manner of such use is the sole purposes. Any determination of the suitability of the material of any use contempiated by the user and the manner of such use is the sole responsibility of the user who must assure that the material as subsequentity processed meets the needs of this particular product or use. We hope the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verific calion but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES which apply to all goods supplied by use assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use which would infringe any patent or copyright. 2014/09 - V01/4

2014/03 - V01/4 Emerson & Cuming Microwave Products N.V., Bell Telephonelaan 2B, B-2440 Geel, Belgium. ECCOSORB, ECCOSTOCK, ECCOSHIELD, ECCOLENS, ECCOPAD are registered trademarks of EMERSON & CUMING MICROWAVE PRODUCTS N. V