




El Ochito™: The Ultimate Ethernet Contact

“The Little Eight”: Eight miniaturized contacts in a standard size #8 shielded module—10G Ethernet ready, with dramatic size and weight reduction compared to all other available solutions

- Up to 50% total weight savings compared to Quadrax-based solutions
- One full Ethernet channel per standard size #8 cavity
- Fast and easy crimp termination of wires to contacts—PC Tails available
- 100% drop-in solution to installed connectors—no redesign or reinstallation of interfaces
- Supplied as crimp contacts, wire pigtails, or in PC tail configurations in the connector of your choice—up to 8 Ochito modules in a size #25 D38999
- Integral spline and short termination maximizes interconnect/cable performance and minimizes crosstalk
- El Ochito™ delivers the highest density contact system available—twice the density of Quadrax, split Quadrax, or other shielded contact solutions
- Tested, qualified, and in-stock for immediate shipment



El Ochito™ is a drop-in solution for Series 80 Mighty Mouse, as well as D38999 Series III, EN4165, EN3645, EPX® and other ARINC standards and is ideally suited for Ethernet, high-definition video, high-speed data loading, and other 1Gb/sec and 10Gb/sec applications.

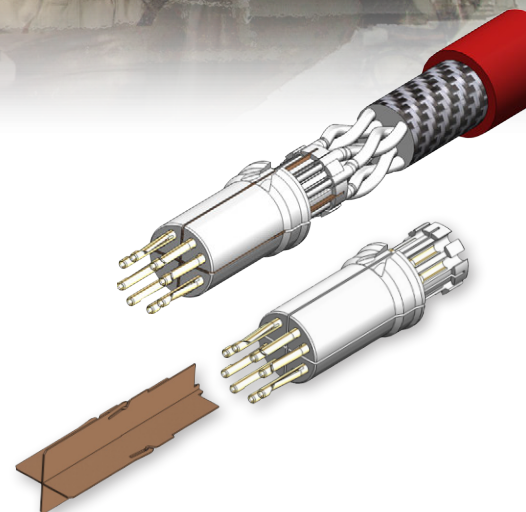

El Ochito™ exploded view:
High mating durability, lightweight contact system with 100 Ohm shielded performance. Note wire twist maintained to contact pair to minimize characteristic impedance mismatch. Also, Conductive isolation shield dramatically reduces crosstalk

Glenair®

For more information
contact Glenair at
818-247-6000 or
visit our website at
www.glenair.com

El Ochito™: The Ultimate Ethernet Contact



Specifications and ordering



How-To-Order El Ochito™ Contacts			
858-003 Size 8 Ochito 26-AWG crimp or solder Pin	858-004 Size 8 Ochito 26-AWG crimp or solder Socket	858-007 Size 8 Ochito PC-Tail Pin (available in factory terminated connectors only)	858-008 Size 8 Ochito PC-Tail Socket (available in factory terminated connectors only)



El Ochito™ utilizes Stinger™ contact technology. These small, durable, low mating force contacts provide El Ochito™ with optimized performance.

Contact Performance Specifications	
Temperature Range	-55°C to +175°C
Environmental Sealing	IAW connector specification
Corrosion Resistance	48 hours salt spray
Fire, Smoke and Toxicity	IAW FAR 25
EMI Shielding	360° shielding for each pair
Nominal Current	1 Amp
Contact Resistance	Max 60 milliohms
Wire	IAW TIA/EIA Cat 6A and ISO Ea
Mating Cycles	> 500
DWV	500 VAC RMS sea level

Recommended wire-to-contact assignments

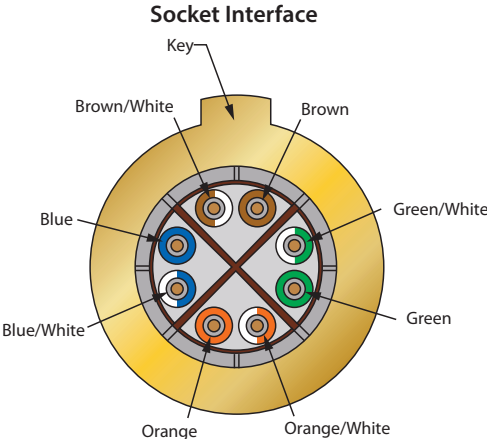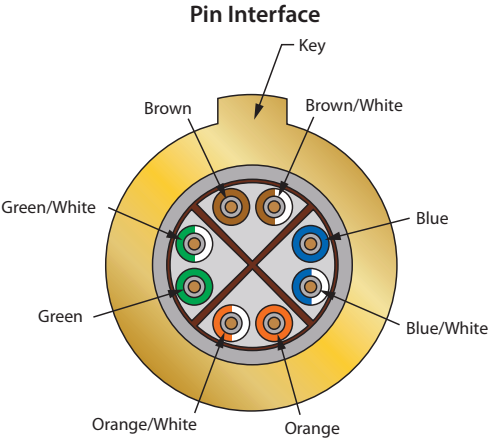


GLENAIR SUPPLIED CABLE FOR OCHITO APPLICATIONS (PIC WIRE DATAMATE LITE) 963-003-26

CABLE PHYSICAL DATA

- Conductors: 26AWG stranded SPC
- Shield coverage: 80% (braid)
- Temperature: -55°C to +200°C
- Outer diameter: 0.220 (5.588mm)
- Minimum bend radius: 1.13 (78.702mm)
- Weight (lbs/100 ft): 3.05 (4.54 kg/100m)

CABLE CONSTRUCTION

1. White PTFE laser-printable jacket
2. Silver-plated copper shield
3. Fluoropolymer tape
4. PFA insulation
5. Fluoropolymer spline
6. Silver-plated copper conductors

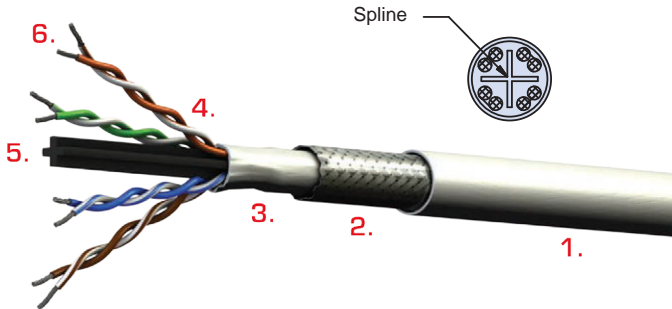



El Ochito™: The Ultimate Ethernet Contact

10 Gigabit Ethernet performance





NEXT (Cat 6A STP Perm)

PASS

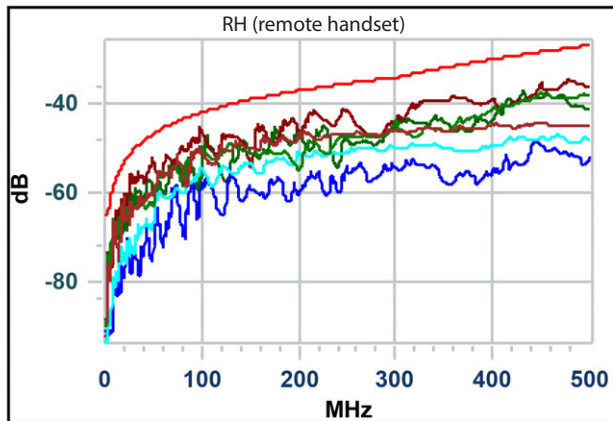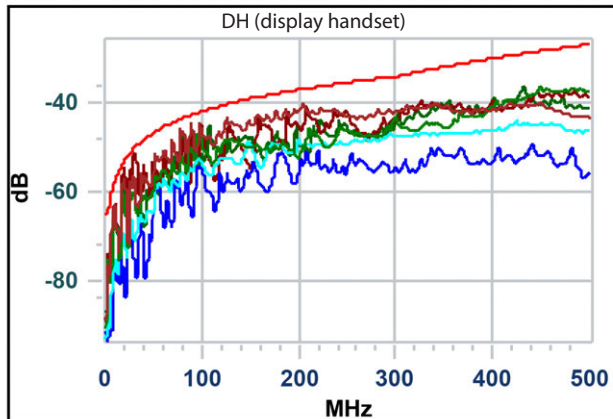


RETURN LOSS (Cat 6A STP Perm)

PASS

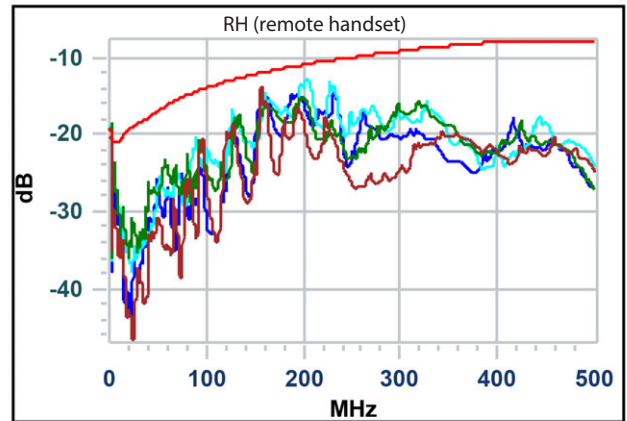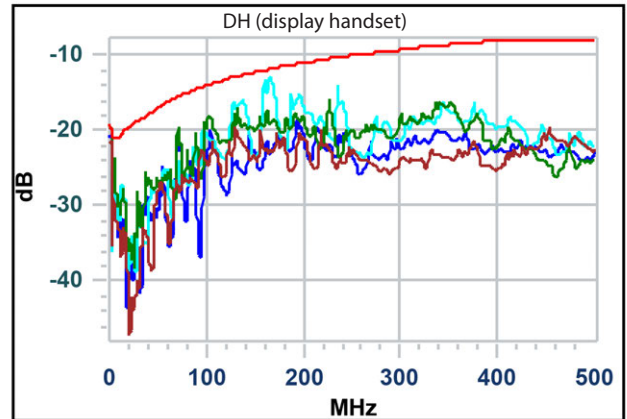


INSERTION LOSS (Cat 6A STP Perm)

PASS

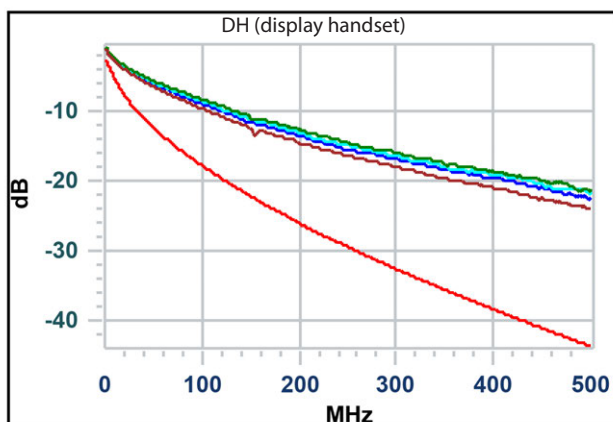

Test configuration: four total Ochito mated pairs, total cable length of approximately 40 meters

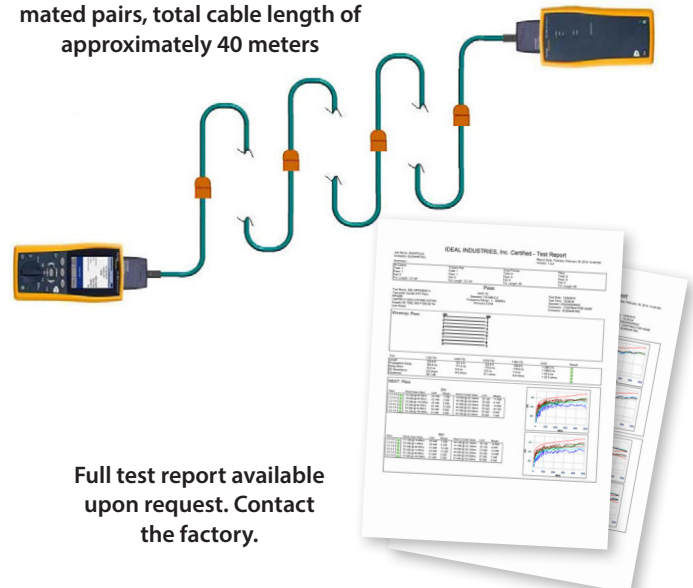

Full test report available upon request. Contact the factory.