
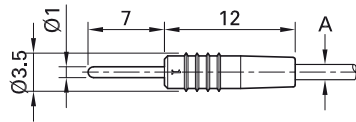


# User configurable plugs and sockets

## Plug SLS1-S

Ø 1 mm rigid for self-assembly of test leads.

**Solder connection.**



Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2602-*	SLS1-S	AC 30 V/6 A DC 60 V/6 A	max. Ø 1.7 mm 0.25 mm <sup>2</sup>	<b>Au</b>	21 22 23

### Component parts

22.2070-*	KT1-S	Connection sleeve
22.1007	LS1-S	Plug



Assembly instructions MA144

[www.staubli.com/electrical](http://www.staubli.com/electrical)




Optional colors 24 25 26 27 28 29

Further information, page 6

## Socket SLS1-B

Ø 1 mm with spring-loaded MULTILAM for self-assembly of test leads.

**Solder connection.**



Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2603-*	SLS1-B	AC 30 V/6 A DC 60 V/6 A	max. Ø 1.7 mm 0.25 mm <sup>2</sup>	<b>Au</b>	21 22 23

### Component parts

22.2070-*	KT1-S	Connection sleeve
22.1008	LS1-B	Socket



Assembly instructions MA145

[www.staubli.com/electrical](http://www.staubli.com/electrical)



Optional colors 24 25 26 27 28 29

Further information, page 6