


Plug SLS2-S

In-line, rigid, Ø 2 mm for self-assembly of test leads.

Solder connection.

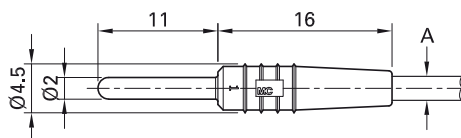

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2609-*	SLS2-S	AC 30 V/10 A DC 60 V/10 A	max. Ø 2.1 mm 0.5 mm ²	Au	21 22 23 24 25 26 27 28 29

Component parts

22.2010-*	KT2-S	Connection sleeve
22.1002	LS2-S	Plug




Assembly instructions MA132

www.staubli.com/electrical

Plug SLS205-L

In-line, Ø 2 mm with spring-loaded MULTILAM for self-assembly of test leads.

Solder connection.

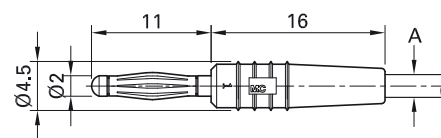

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.2618-*	SLS205-L	AC 30 V/10 A DC 60 V/10 A	max. Ø 2.1 mm 0.5 mm ²	Au	21 22 23 24 25 26 27 28 29

Component parts

22.2010-*	KT2-S	Connection sleeve
22.1009	LS205-L	Plug for SLS205-L



Assembly instructions MA136

www.staubli.com/electrical