


Plug SL205-K

Stackable, Ø 2 mm, with spring-loaded MULTILAM, for self-assembly of test leads.

With rigid insulating sleeve.
Solder connection.

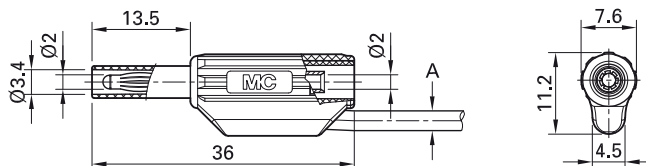

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors															
65.9182-*	SL205-K	600 V, CAT II / 10 A	<table border="0"> <tr> <td>PVC</td> <td>Ø 2.3 mm</td> <td rowspan="2">0.5 mm²</td> </tr> <tr> <td>SIL</td> <td>Ø 2.7 mm</td> </tr> </table>	PVC	Ø 2.3 mm	0.5 mm ²	SIL	Ø 2.7 mm	Au	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> <tr> <td>29</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	21	22	23	24	25	29				
PVC	Ø 2.3 mm	0.5 mm ²																		
SIL	Ø 2.7 mm																			
21	22	23	24	25																
29																				




Assembly instructions MAH500

www.staubli.com/electrical

Socket SLS205-B

Ø 2 mm rigid for self-assembly of test leads.
Soft insulator.

Solder connection.

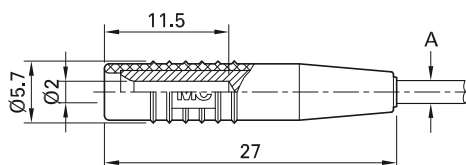

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors				
22.2621-*	SLS205-B	30 VAC / 10 A 60 VDC / 10 A	max. Ø 2.3 mm	0.5 mm ²	Au	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> </tr> </table>	21	22	23
21	22	23							

Component parts

22.2360-*	KT205-S	Insulator
22.1038	LS205-B	Socket



Assembly instructions MA138

www.staubli.com/electrical