
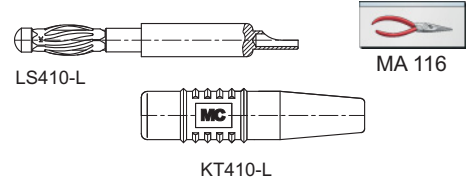


**Axiale Ø 4 mm-Stecker**

**In-line Ø 4 mm Plugs**

**Fiches Ø 4 mm droites**

**SLS410-L**

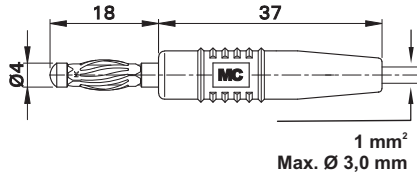

Axiale Ø 4 mm-Stecker mit federnder Kontaktlamelle für die Selbstmontage von Messleitungen. Weiche Isoliertülle. **Lötanschluss.**

In-line Ø 4 mm plugs with spring-loaded Multilam for self-assembly of test leads. Soft insulator. **Solder connection.**

Fiches à lamelles Ø 4 mm droite, destinées à la confection de cordons de mesure. Manchon isolant souple. **Raccord à souder.**

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile: Knüpfülle / Stecker Component parts: Insulator / Plug Pièces détachées : Capuchon isolant / Fiche	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	--	----------------------------------

<b>SLS410-L</b>	<b>22.2646*</b>	30 V <sub>AC</sub> ~ 60 V <sub>DC</sub> / max. 19 A	KT410-L, 22.2170-* / LS410-L, 22.1011	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">Au</div> <table border="1" style="font-size: 8px;"> <tr> <td style="background-color: black; color: white;">21</td> <td style="background-color: red; color: white;">22</td> <td style="background-color: blue; color: white;">23</td> <td style="background-color: yellow; color: black;">24</td> <td style="background-color: green; color: white;">25</td> </tr> <tr> <td style="background-color: purple; color: white;">26</td> <td style="background-color: orange; color: white;">27</td> <td style="background-color: grey; color: white;">28</td> <td style="background-color: brown; color: white;">29</td> <td></td> </tr> </table> </div>	21	22	23	24	25	26	27	28	29	
21	22	23	24	25										
26	27	28	29											